

RECUPLASTIK VII

Recover VII is the latest evolution of this type of equipment. It takes into account the demands of users to **collect more, faster** and with less waste.

Composed of a lifting mast and a rotating head driven by a cylinder giving it a **working angle of 111°**. The collection is done from the side or from the front. The head of the machine is located at 2.90 m from the ground when it is unfolded, and allows the bales to be emptied into 40 m³ bins.

Front or rear hitch

Telescopic mast 1200 mm

The cleaning function is carried out by a beater that allows the removal of soil, plant waste and water, with a hator

Its innovative design with :


- Its new rotation head
- Its centre of gravity close to the tractor
- Its opening kinematics
- Its beater guide ring,

make it the **most powerful machine** on the market.



Ergonomics and safety have not been forgotten:

- The retractable stand integrated in the frame is foldable
- The markings of all the connectors with the diagram engraved on the chassis
- The easy-to-use valve block

Designed for the collection of 500-hole film, mulch film, forcing film, greenhouse film and P17 propylene netting and sheeting.

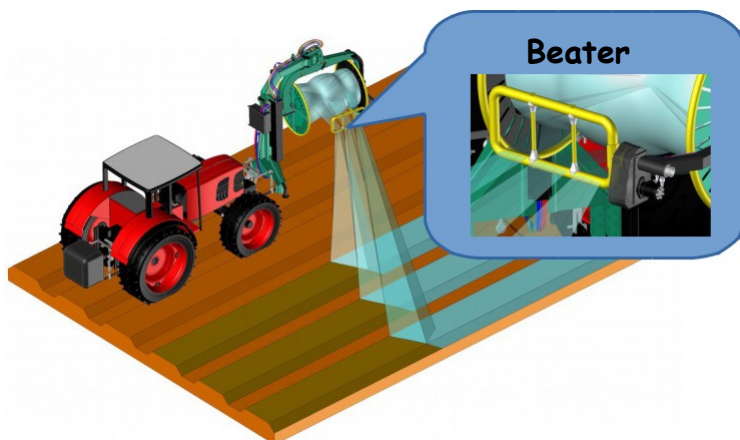

Control box

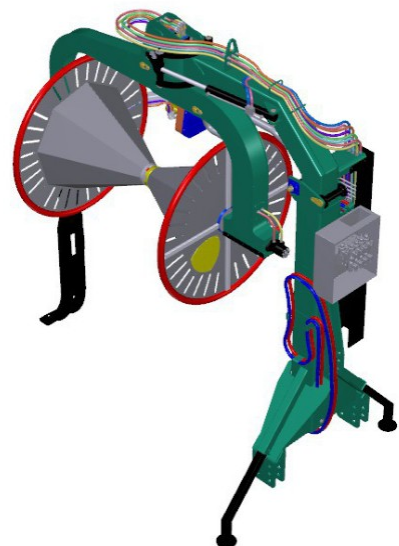

PERFORMANCE TABLE

<i>Tractor power required</i>	<i>120 to 160 hp</i>
<i>Hydraulics</i>	<i>Tractor distributor direct tank return</i>
<i>Power supply</i>	<i>12 VDC</i>
<i>Weight</i>	<i>1242 Kg</i>
<i>Length</i>	<i>3 meter</i>
<i>Width</i>	<i>1,90 meter</i>
<i>Height</i>	<i>3,40 meter</i>
<i>3-point linkage front and rear</i>	<i>Category 2</i>
<i>Ballast</i>	<i>See notice</i>
<i>Forward speed</i>	<i>0 to 25 Km/h</i>
<i>Width of harvested plastic film</i>	<i>From 0,50 to 6000</i>
<i>Coil diameter</i>	<i>1300 mm</i>